


SILVERNET




- SilverCloud Management
- IEEE 802.11n compliant
- Backward compatible with 802.11a/b/g
- Indoor and Outdoor Applications
- AES Encryption
- MIMO with Spatial Multiplexing
- DFS (Dynamic Frequency Selection)
- TPC (Transmit Power Control)
- PoE 802.3af
- ONVIF Compliant
- Surge Protected Radio and PSU
- Up to 300Mbps data rates
- IEEE802.11i , IEEE802.1x authentication
- Public + Private SSID

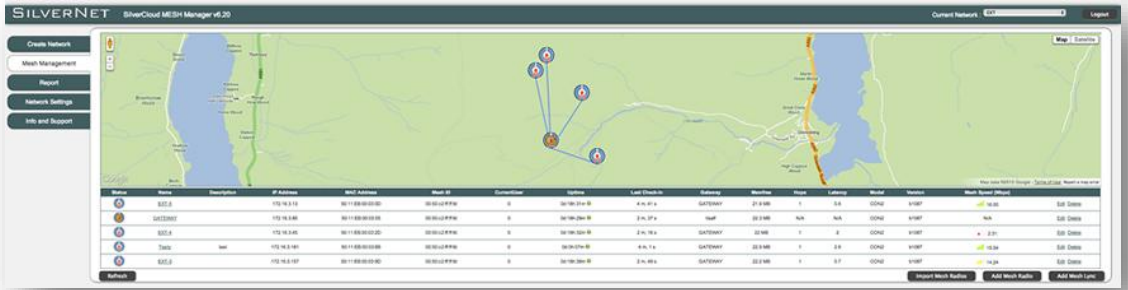

Connect1



Connect2

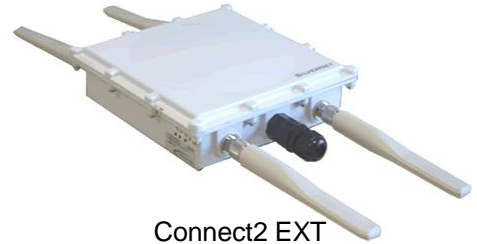

Connect2 EXT

The SilverNet MESH system uses an advanced algorithm to enhance the throughput and reduce time-outs from the centre to the edge of the network.

The system can also simultaneously support wireless hotspot coverage. It provides wireless broadcast access and high bandwidth for applications such as - audio/data/video, services for the municipal administration, public security etc.

Each wireless node can self-configure and connect to the network, The system is a high performance wireless MESH network system that dynamically optimises traffic path routes and ensures network stability and throughput.

A network failure can be repaired automatically so that the overall performance and the usability is unaffected.

Benefits:

- Stable and reliable network. Have the ability of automatic adjustment to choose optimal path.
- Simple network structure. Easy to install. New node to join the network can be discovered automatically.
- SilverCloud NMS is used to Monitor and Configure all radios

SilverCloud is a Cloud Based management utility that allows you to monitor all your MESH nodes and networks from one location. SilverCloud can be accessed from any internet connection thus reducing the need for site attendance, enabling you to have complete control of you infrastructure and optimise network operation at multiples of sites at once.

SilverCloud allows you to monitor uptime, DL/UL Usage, Mesh Speed, Outages and configure your whole network from one location and one setup page.

Product Model SKU

11n 300 Mesh Range	SILMESH1-INT (Indoor Single Radio MESH)	SILMESH2-INT (Indoor Dual Radio MESH)	SILMESH2-EXT (Outdoor Dual Radio MESH)
Radio Specification			
Transmission rate	11n: Up to 300Mbps 11b/g Backwards Compatible	11n: Up to 300Mbps 11a/b/g Backwards Compatible	
MIMO	2x2 Spatial Multiplexed Streams	2x2 Spatial Multiplexed Streams	
Modulation	HT-OFDM with BPSK, QPSK, 16QAM, 64QAM	HT-OFDM with BPSK, QPSK, 16QAM, 64QAM	
Standards	IEEE802.11n, IEEE802.11bg	IEEE802.11n, IEEE802.11a, IEEE802.11bg	
Channel Size	5MHz, 10MHz, 20MHz, 20/40MHz (Auto)	5MHz, 10MHz, 20MHz, 20/40MHz (Auto)	
Channel (Country Dependent)	USA (FCC): 2.412GHz – 2.462GHz Europe (ETSI): 2.412GHz - 2.472GHz	USA (FCC): 5.15GHz - 5.825GHz Europe (ETSI): 5.47GHz - 5.850GHz USA (FCC): 2.412GHz – 2.462GHz Europe (ETSI): 2.412GHz - 2.472GHz	
RF output power	Up to 23dBm from port	Up to 26dBm from ports	
Sensitivity	-78dBm@54Mbps, -71dBm@300Mbps	-82dBm@54Mbps, -74dBm@300Mbps	
Antenna	Integrated Dual polarized Antenna (H+V)	4 x Omni Antenna (RsmA)	4 x Omni Antenna (Ntype) Optional – 120/90 Sector antenna or 12dBi Dual polarised Omni
Security - Network			
WPA2 (AES)	AES 128-BIT		
Legacy Encryption	TKIP, WEP 64 / 128 / 152 bits		
802.1x	Supports 802.1x Client and Server		
Radius	Supports Radius Client, 802.11i		
QoS	Asymmetric Bandwidth Control		
Vlan	802.1Q: Management, trunk, access and transparent mode		
Electrical – Interface			
LANWAN	2x 10/100BASE-T (RJ-45) LAN Ports (with Auto MDI/MDIX)	2 x 10/100/1000 BASE-T(RJ-45) LAN Port (with Auto MDI/MDIX)	10/100/1000 BASE-T(RJ-45) LAN Port (with Auto MDI/MDIX)
Power	5.5 watts (typical), 16 watts (max) DC 5–24 Volt or POE (included in kit 100-240vac)	6 watts (typical), 16 watts (max) DC 24–48 Volt or POE (PSU included in kit 100-240vac)	6 watts (typical), 16 watts (max) DC 24–48 Volt or POE (POE Injector included in kit 100-240vac)
Physical			
Dimensions	Unpacked radio 10 x 75 x 2.6 (cm) each	Unpacked radio 16.5 x 11.5 x 3.6 (cm) each	Unpacked radio 22 x 22 x 7.5 (cm) each
Weight	Unpacked radio 0.13Kg Each	Unpacked radio 0.4Kg Each	Unpacked radio 1.6Kg Each
Dust and Waterproof	N/A		Ip66 Certified
Mounting Bracket	N/A		3 Axis Magnesium alloy , wall or pole mount (included in kit)
Environment			
Operating Temperature	-20–70°C (Storage -40–90°C)		-20–70°C (Storage -40–90°C)
Humidity	5–95 % (non-condensing)		0–95 % (non-condensing)
Other			
Warranty	2 Year Parts and labour		
MTBF	60000 Hrs		
Pack Contents	1 x 11n MESH Radio, 1 x Power Supply	1 x 11n MESH Radio, 1 x Power Supply , 4 x Omni antenna (3/5dbi)	1 x 11n MESH Radio, 1 x POE injector, 1 x Mounting bracket sets, 4 x Omni Antenna (5/7dBi)
SilverCloud Management			
Management	Auto node Configuration, Google maps, office maps or SilverView		
Monitoring	Monitor uptime, DL/UL Usage, Latency, Outages, MESH speed		
Firmware	Auto Upgradeable via SilverCloud or via Web interface		

Distributed by:

Copyright © SilverNet Limited. All rights reserved. All other company and product names may be trademarks of their respective companies. Whilst every effort is made to make sure the information shown is accurate SilverNet Limited cannot accept liability for any errors that may arise.
No freedom to use information, patents, trade marks, or other intellectual property rights is implied by the publication of this document. E&OE
SilverNet Limited reserve the right to change specifications and other information within this document without notice and your attention is brought to the fact that performance figures are under ideal conditions. Actual performance will depend on many environmental factors and it is recommended that a site survey if undertaken prior to installation.
Please also note that this equipment may also be subject to local legislative restrictions such as Band C operation within the UK. It is the end users responsibility to ensure that the installation complies with any such restrictions that are in force.

