

ANTENNAS | OMNI-0902 SERIES

## HIGH GAIN, OMNI-DIRECTIONAL, 2x2 MIMO LTE/5G

### ANTENNA

617 – 4200 MHz, 8 dBi



|   |  |   |  |   |  |
|---|--|---|--|---|--|
| <br>617 – 960 MHz<br>1427 – 1517 MHz<br>1710 – 2700 MHz<br>3400 – 4200 MHz | <br>8 dBi           | <br>Increase<br>X Mb/s | <br>Omni-<br>Directional     | <br>4G LTE   | <br>5G    |
| <br>BAND<br>71   | <br>3.5 GHz<br>CBRS | <br>-40°C to +80°C     | <br>Salt Spray<br>Protection | <br>2x2 MIMO | <br>IP 68 |



APPLICATION AREAS

- High performance, omni-directional marine & coastal antenna
- 2x2 MIMO capability for improved performance
- Covers contemporary LTE/5G bands from 617 to 4200 MHz
- UV and saltwater protected for marine and coastal conditions
- Robust and all-weather proof for harsh conditions at sea (IP 68)
- Optional 316 stainless steel mounting bracket available

### Product Overview

The OMNI-902 is a high gain, ultra-wideband antenna, which covers all contemporary LTE/5G frequency bands with excellent balanced gain across all frequencies from 617 to 4200 MHz. The antenna offers 2x2 MIMO capability from its vertically separated radiating elements, all in the same single radome. The antenna design combines two high gain omni-directional antennas, which allows for superior pattern control over the entire frequency range. The combination of high gain omni-directional antennas makes the OMNI-902 a true omni-directional 2x2 MIMO antenna, suitable for marine and coastal applications.

The antenna comes with an IP68 protection rating against dust and water ingress, making it ideal for most severe storms at sea. The radome is also fully salt water protected so that it can be used in highly corrosive environments, thanks to the fiberglass radome material. The OMNI-902 guarantees signal reception almost everywhere and is usable in all part of the world. The ultra-wideband performance makes the antenna future proof, as it covers LTE Band 71 (617 to 698 MHz) as well as the CBRS bands from 3400 to 4200 MHz for inland use.

### Features

- High performance, 2x2 MIMO omni-directional antenna
- Wideband antenna for LTE/5G (617 to 4200 MHz)
- Includes Band 71 (617 to 698 MHz) and 3.5 GHz 5G band
- Robust and weather resistant enclosure with IP 68 rating
- UV and salt-water resistant enclosure

### Application Areas


- Marine applications: Super Yachts / Boats / Ferries
- Enhanced LTE/4G and 5G reception
- Increase system transmission reliability
- High-end industrial grade router applications
- Industrial and commercial LTE/5G deployment
- Agricultural and farming LTE/5G data distribution



### OMNI-0902

**Frequency Band**

The OMNI-0902 is an omni-directional antenna that works from 617 – 960 MHz | 1427 – 1517 MHz | 1710 – 2700 MHz | and | 3400 – 4200 MHz |

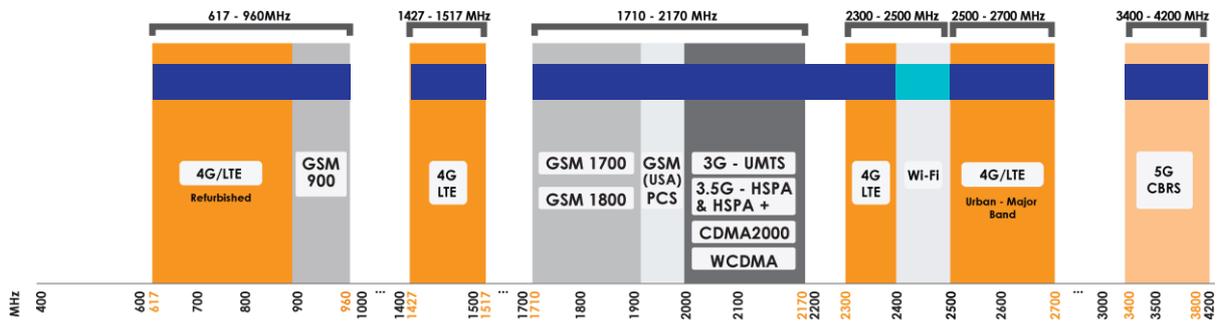

Indicates the LTE bands on which OMNI-0902 works  Indicates the WI-FI bands on which OMNI-0902 works

**Antenna Derivatives**

| Product Order Code (SKU) | OMNI-0902-V1-01     | OMNI-0902-V1-02     |
|--------------------------|---------------------|---------------------|
| Ports                    | 2                   | 2                   |
| Coax Cable Type          | Twin HDF 195        | N/A                 |
| Coax Cable Length        | 2m                  | N/A                 |
| Connector Type           | N-Type (F)          | N-Type (F)          |
| Product Weight           | 4.76 kg             | 4.7 kg              |
| Packaged Weight          | 9.50 kg             | 7.10 kg             |
| Packaged Dimensions      | 1710 x 180 x 210 mm | 1710 x 180 x 210 mm |
| EAN                      | 6009710924174       | 6009710924914       |

*\*The coax cable & connector are factory mounted to the antenna*

### Electrical Specification

|                             |  |
|-----------------------------|--|
| <b>Frequency Bands:</b>     | 617 – 960 MHz<br>1427 – 1517 MHz<br>1710 – 2700 MHz<br>3400 – 4200 MHz                                     |
| <b>Gain (Max):</b>          | 6 dBi @ 617 – 960 MHz<br>5.8 dBi @ 1427 – 1517 MHz<br>8 dBi @ 1710 – 2700 MHz<br>5.5 dBi @ 3400 – 4200 MHz |
| <b>Gain (Mean):</b>         | 3 dBi @ 617 – 960 MHz<br>2 dBi @ 1427 – 1517 MHz<br>6 dBi @ 1710 – 2700 MHz<br>3.8 dBi @ 3400 – 4200 MHz   |
| <b>VSWR:</b>                | ≤2.5:1<br>Across 90% of the bands  |
| <b>Feed Power Handling:</b> | 10 W   |
| <b>Input Impedance:</b>     | 50 Ohm (nominal)   |
| <b>Polarisation:</b>        | Linear Vertical  |
| <b>Coax Cable Loss:</b>     | 0.385 dB/m @ 900 MHz<br>0.507 dB/m @ 1500 MHz<br>0.565 dB/m @ 1800 MHz<br>0.788 dB/m @ 3000 MHz            |
| <b>DC Short:</b>            | Yes  |

### Product Box Content

|                          |                         |
|--------------------------|-------------------------|
| <b>Antenna:</b>          | A-OMNI-0902             |
| <b>Mounting Bracket:</b> | Wall/Pole Mount Bracket |

### Mechanical Specification

|                           |  |
|---------------------------|--|
| <b>Product Dimensions</b> | 1654 mm x Ø145 mm<br>(Incl. Mounting Base) |
| <b>Radome Material:</b>   | Fiberglass with 316 Stainless Steel Caps   |
| <b>Radome Colour:</b>     | Brilliant White<br>Pantone P 179-1C        |
| <b>Mounting Type:</b>     | Pole, Wall and Surface Mounted             |


### Environmental Specifications, Certification & Approvals

|   |                                     |
|---|-------------------------------------|
| <b>Wind Survival:</b>                           | <190 km/h                           |
| <b>Temperature Range (Operating):</b>           | -40°C to +80°C                      |
| <b>Environmental Conditions:</b>                | Outdoor/Indoor                      |
| <b>Water Ingress Protection Ratio/Standard:</b> | IP 68                               |
| <b>Salt Spray:</b>                              | MIL-STD 810G/ASTM B117              |
| <b>Operating Relative Humidity:</b>             | Up to 98%                           |
| <b>Storage Humidity:</b>                        | 5% to 95% - non-condensing          |
| <b>Storage Temperature:</b>                     | -40°C to +80°C                      |
| <b>Enclosure Flammability Rating:</b>           | UL 94-HB                            |
| <b>Impact Resistance:</b>                       | IK 10                               |
| <b>Product Safety &amp; Environmental:</b>      | Complies with CE and RoHS standards |




Antenna Performance Plots

VSWR

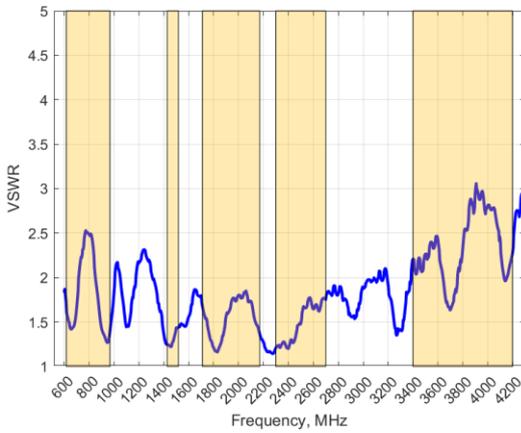

GAIN (EXCLUDING CABLE LOSS)

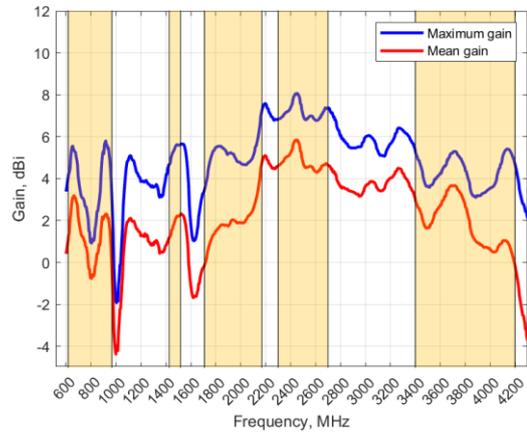

Voltage Standing Wave Ratio (VSWR)\*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-902 delivers superior performance across all bands with a VSWR of 2.5:1 or better across 90% of the bands.

\*VSWR measured with a 2m low loss cable.


Gain\* in dBi

8 dBi is the peak gain across all bands from 617 – 4200 MHz

|                                     |                  |
|-------------------------------------|------------------|
| Gain @ 617 – 960 MHz (Max; Mean):   | 6 dBi; 3 dBi     |
| Gain @ 1427 – 1517 MHz (Max; Mean): | 5.8 dBi; 2 dBi   |
| Gain @ 1710 – 2700 MHz (Max; Mean): | 8 dBi; 6 dBi     |
| Gain @ 3400 – 4200 MHz (Max; Mean): | 5.5 dBi; 3.8 dBi |


\*Antenna gain measured with polarisation aligned standard antenna

Technical Drawings

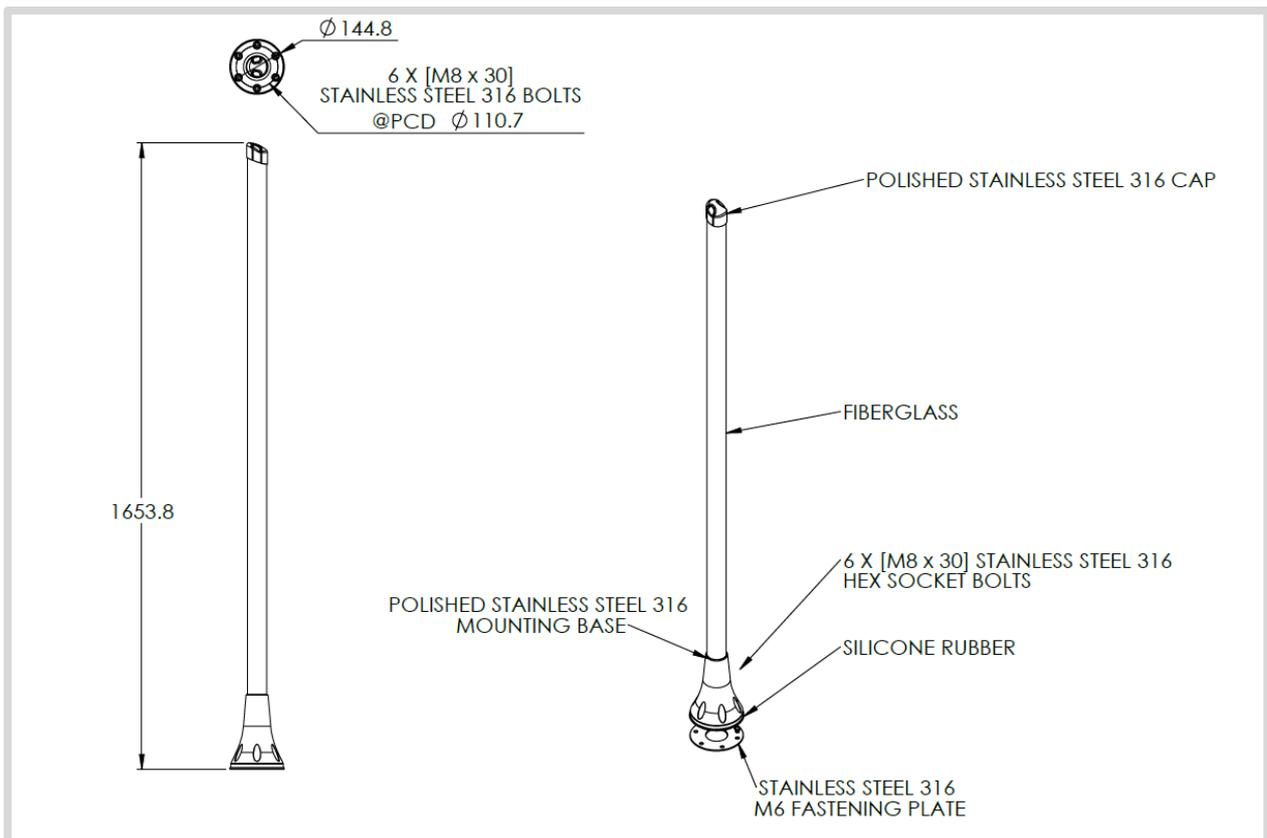


**Radiation Patterns**


**Azimuth: 617 – 968 MHz**

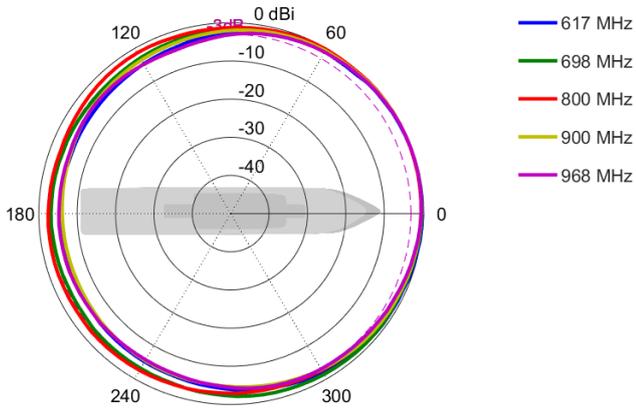


**Azimuth: 1427 – 1517 MHz**

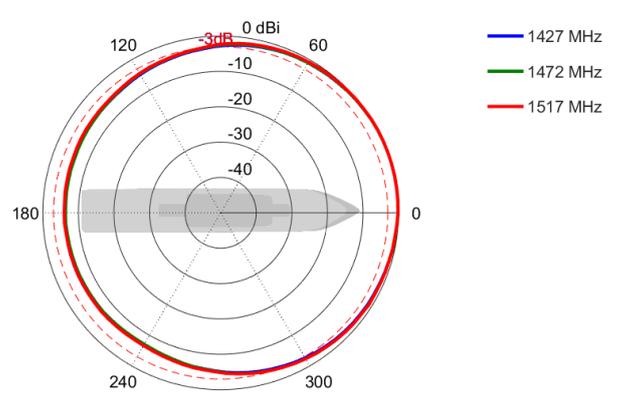


**Azimuth: 1710 – 2170 MHz**

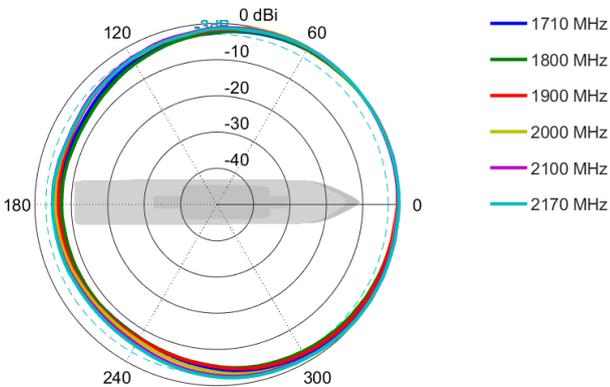


**Azimuth: 2300 – 2700 MHz**

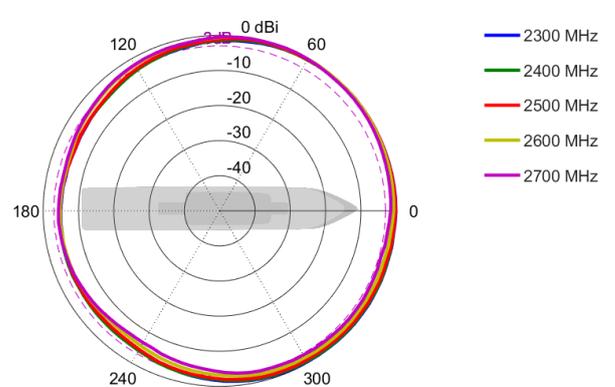


**Azimuth: 3400 – 4200 MHz**

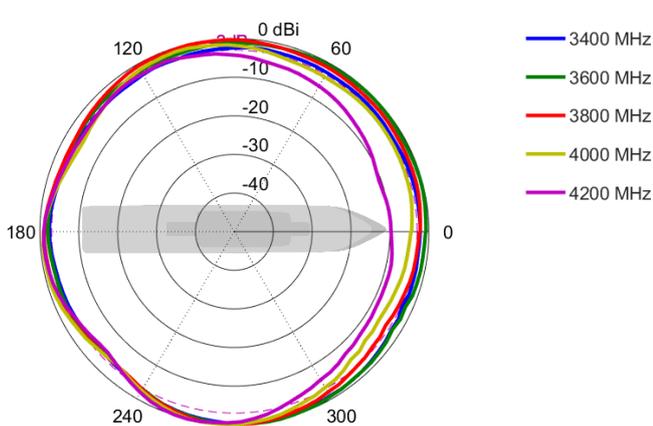


**Elevation: 617 – 968 MHz**

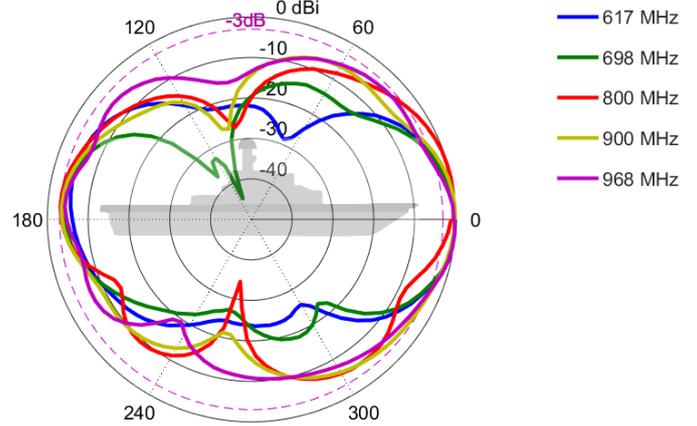


Elevation: 1427 – 1517 MHz

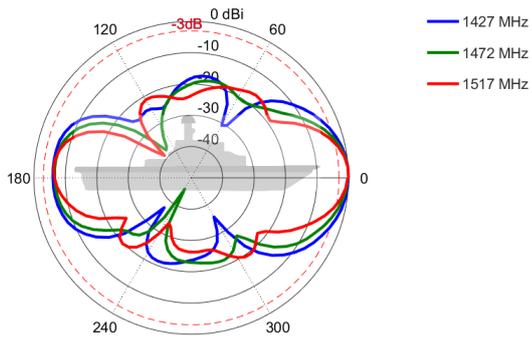


Elevation: 1710 – 2170 MHz

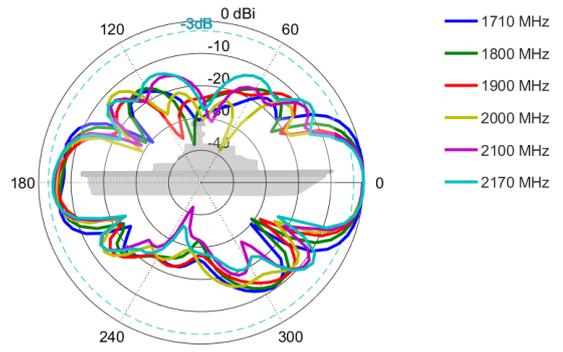

Elevation: 2300 – 2700 MHz

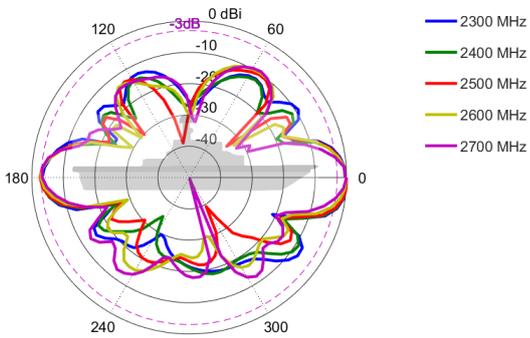

Elevation: 3400 – 4200 MHz

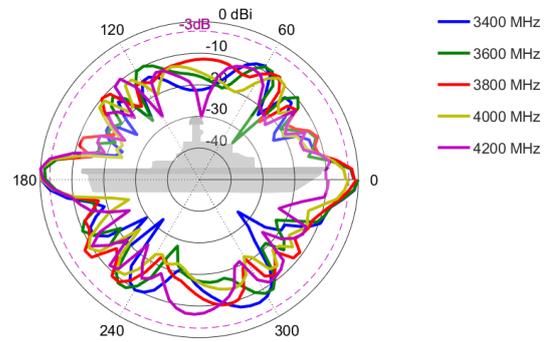

**Mounting Options**



**Surface Mount**

Surface mount using included base and mounting plate



**Pole Mount**

Pole mount using optional A-BRKT-090 (Not included)



**Wall Mount**

Wall mount using optional A-BRKT-090 (Not included)

---

## Additional Accessories



**BRKT-90**

Narwhal Series Marine Bracket, 316 Stainless Steel

See accessories technical specifications on [www.poynting.tech](http://www.poynting.tech)

---

## CONTACT POYNTING

### **Poynting Antennas (Pty) Ltd - Head Office**

Unit 4, N1 Industrial Park,  
Landmarks Avenue,  
Samrand, 0157, South Africa

**Phone:** +27 (0) 12 657 0050

**E-mail:** [info@poynting.tech](mailto:info@poynting.tech)

**International Email:** [sales-global@poynting.tech](mailto:sales-global@poynting.tech)

### **Poynting Europe**

Regus Business Center Neue Messe Riem  
Kronstadter Straße 4  
81677 München  
Germany

**Phone:** +49 89 7453 9002

**E-mail:** [sales-europe@poynting.tech](mailto:sales-europe@poynting.tech)

### **Poynting USA**

1804 Owen Court, Suite 104,  
Mansfield,  
TX 76063  
USA

**Phone:** +1 817 533-8130

**E-mail:** [sales-us@poynting.tech](mailto:sales-us@poynting.tech)