

WiFi 6e Paddle Antenna

PWB-24-58-72[-VAR]

PANORAMA ANTENNAS



Reverse Polarity SMA
Version

FAKRA I Jack Version

PWB-24-58-72[-VAR]


- Supports extended WiFi 6e frequencies
- Suitable for routers and terminals
- Articulated FAKRA I jack or reverse polarity SMA plug

The PWB-24-58-72 antenna is a ground plane independent antenna covering global WiFi 6e bands in the ranges 2400-2495 / 5150-7125MHz.

Designed for direct mounting to modems and routers the PWB-24-58-72 range is fitted with either an articulated reverse polarity SMA plug or FAKRA I jack for flexible positioning.

Technical Drawing

PWB-24-58-72-RSMARV Shown

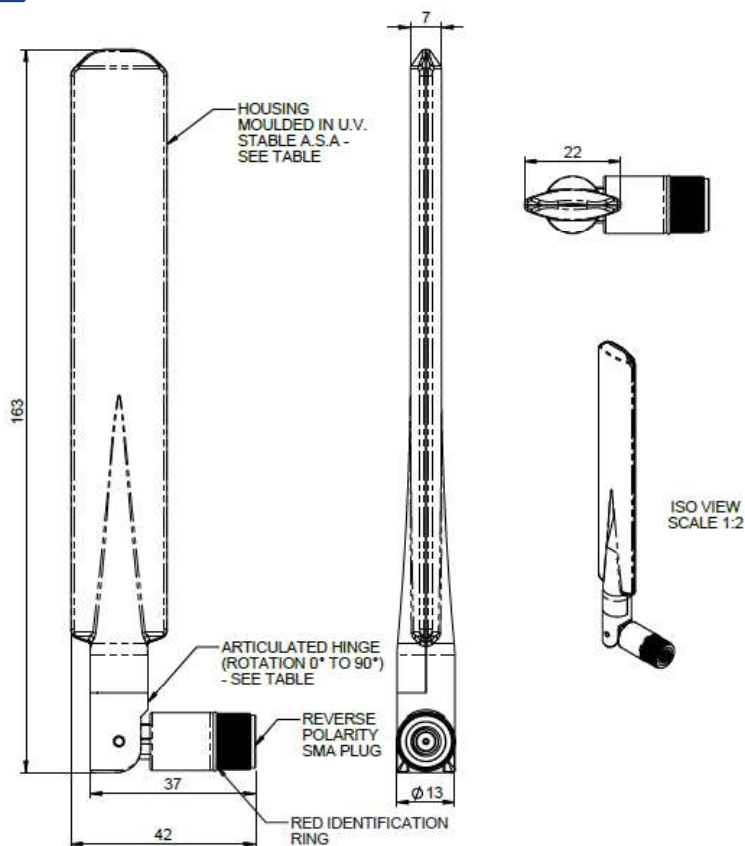

WiFi 6e Paddle Antenna


PWB-24-58-72[-VAR]

PANORAMA ANTENNAS

Product Data

Part No.		
PWB-24-58-72-RSMARV		PWB-24-58-72-RFIJ
Electrical Data		
Frequency Range (MHz)		2400-2495 / 5150-7125
Polarisation		Vertical
Pattern		Omni-directional
Impedance		50Ω
Max Input Power (W)		5
Mechanical Data		
Dimensions (mm)	Length	163 (6.4")
	Width	22 (0.8")
	Thickness	7 (0.27")
Material		ASA
Operating Temp (°C)		-40°/ 176°F (-40° / +80°C)
Colour		Black
Termination Data		
Type	Reverse Polarity SMA Plug	Fakra I Jack

Electrical Data

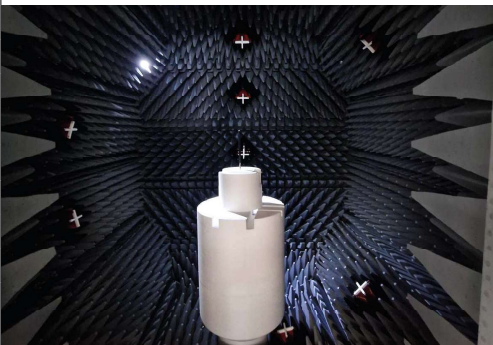Measurement Conditions	WiFi Antenna			
	Frequency Range (MHz)	Bands	Peak Gain (dBi)	Efficiency (%)
Measured in 3D anechoic chamber in free space 	2400-2495	2.4GHz	2.8	64
	5150-5250	U-NII-1	2.2	47
	5250-5350	U-NII-2A	2.7	50
	5350-5470	U-NII-2B	3	55
	5470-5725	U-NII-2C	3	54
	5725-5850	U-NII-3	1.9	48
	5935-6415	U-NII-5	2	50
	6435-6515	U-NII-6	2.6	50
	6535-6875	U-NII-7	2.6	49
	6875-7115	U-NII-8	1.7	40


WiFi 6e Paddle Antenna

PWB-24-58-72[-VAR]

PANORAMA ANTENNAS


Electrical Data

Typical VSWR*

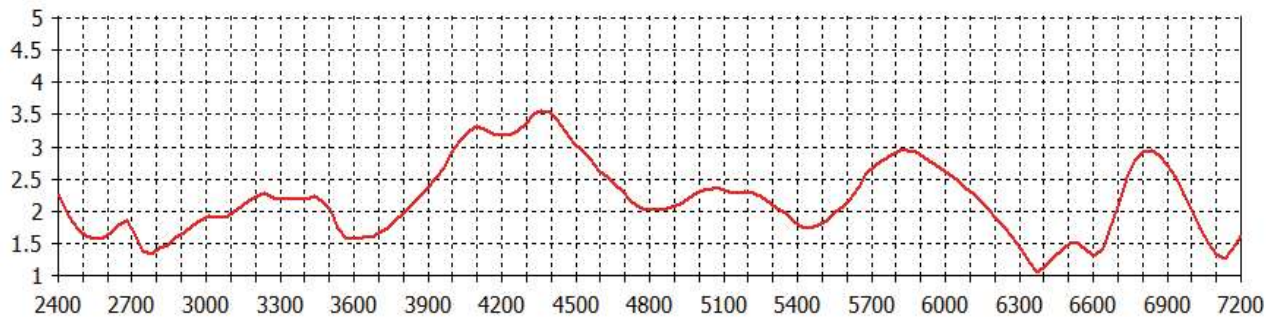


*VSWR measured in free space.

Typical Efficiency*

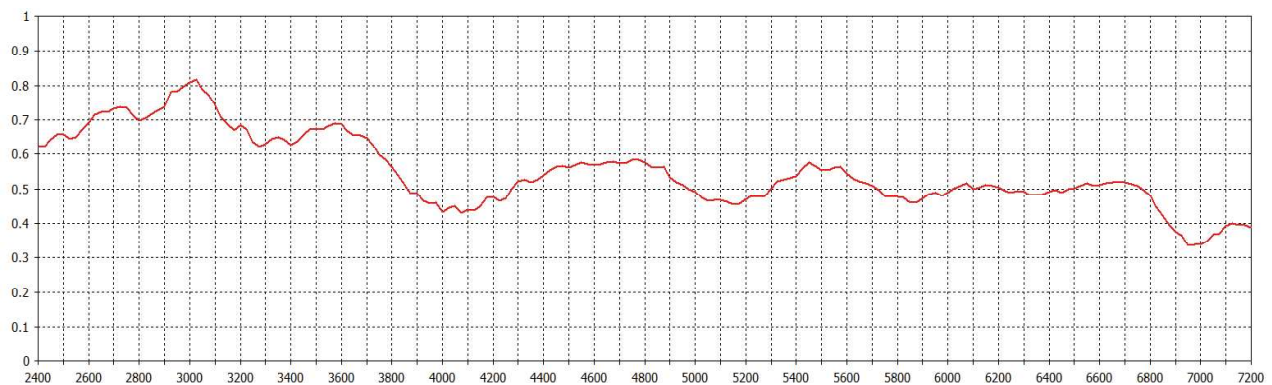

*Efficiency measured in free space.

Typical Peak Gain*

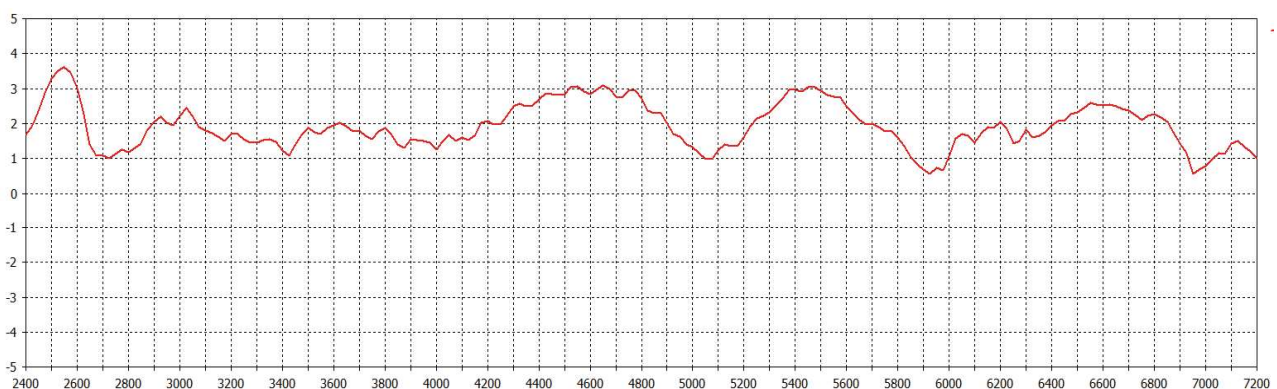

*Peak gain measured in free space.


WiFi 6e Paddle Antenna

PWB-24-58-72[-VAR]


PANORAMA ANTENNAS

Pattern Data


Typical 3D Pattern - 2450 MHz

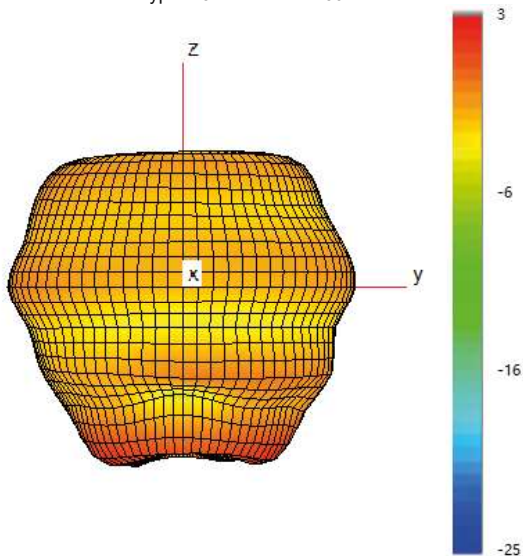


Typical H Plane Patterns- 2400-2500MHz

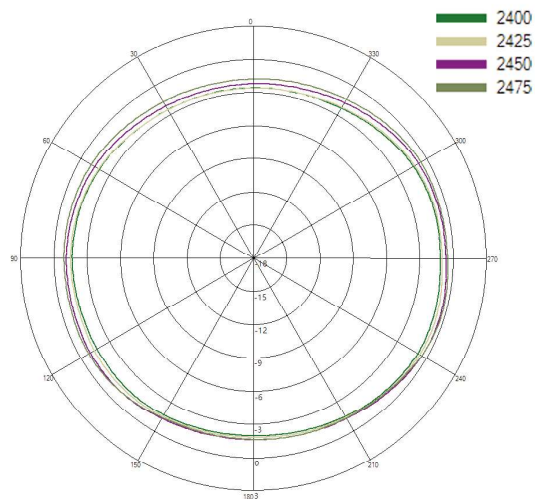


Typical 3D Pattern - 5500 MHz

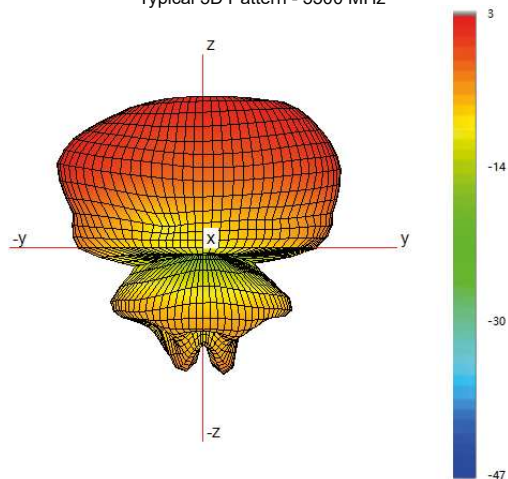

Typical H Plane Patterns - 5250-5750 MHz

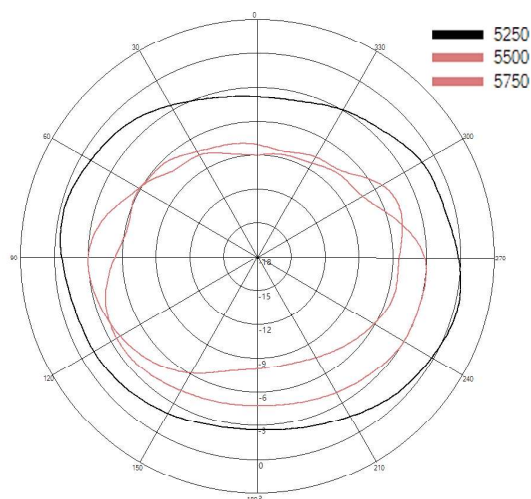

Typical 3D Pattern - 6500 MHz

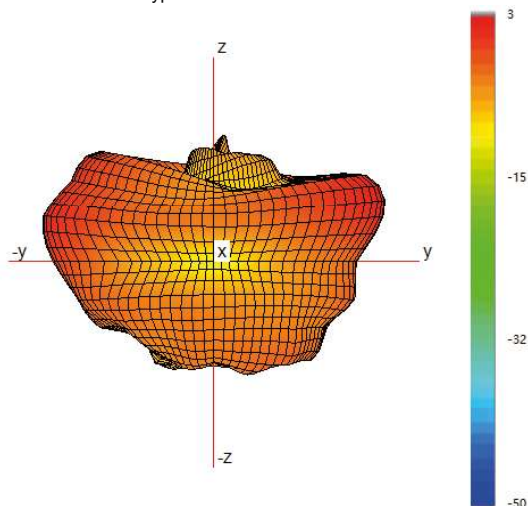

Typical H Plane Patterns - 6250-6750 MHz

